


# WMT-3000

## Biometric Data Capture System

Management and issuance of official documentation such as Passports, Driver License Cards, ID Cards, Student Cards, Various Access Cards, Credit Cards and Various Membership Card which require Biometric Data authentication, including Face Recognition



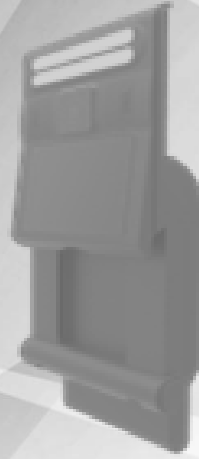

## WMT-3000 Description

- Biometric Data Capture System, WMT-3000, installed to Korean consulate about 100 countries in the world for the convenience to local resident and traveler.
- WMT-3000 photo booth is robust and assembled easily as well as presented the quality ID photo by blocking the outside light.
- Auto Elevating system and Distance sensor makes it possible to set with match the face location.
- 1.3 mega Auto Focusing camera and 5700K / 75CRI LED lights optimized for taking an ID photo is ideal for passport as well as other ID photo.
- 2 USB 3.0 ports and 10.1" display touch monitor makes easy control and maintenance.
- User friendly software makes simple and quick to issue the passport or identification document.



## Features

- Highly Reliable and Extreme Performance
- Compact and Ergonomic Design
- High Resolution Industrial Grade AF Camera
- Automatic Elevating System to match the Face Location
- Automatic Light Adjustment Based on Distance Sensor
- Optional ID, Fingerprint Reader and Sign PAD Devices
- Various Installation Environments including Wall Mount
- Easy Maintenance

## Hardware Specification

Content	Item	Specification	Content	Item	Specification
Main	CPU	Intel QuadCore-2.0GHz	Audio	Speaker	2watt Speaker for audio instructions
	Memory	DDR3-4GB		Microphone	Highly Sensitive Microphone
	Storage	2.5" SSD, Flash-64GB	Sensor	Distance	Max. 1.5meter for Face Recognition
	I/O	2*Gigabit LAN, 2*USB 3.0		Up-Down	Max. 25cm, supports Speed Control
Display	LCD	10.1" 1280*800 LCD, 350nits	Power		AC 90-264V, 50-60Hz Input
	Touch	10 Point Capacitive Touch	S/W	OS	Windows-7 (64bits) or above
Biometric Device	Camera	1.3Mega CMOS AF Camera		Application	
	ID Scanner/ Finger Print	Duplex Color Scanning tech / Resolution-500DPI, Speed-within 0.4sec	Size	mm	324(W) x 453(D) x 703(H)
Flash Light	LED	White LED, 5700K, 75CRI, Supports Dimming Control	Certification	Local	KC (EMI/EMC/SAFETY)
Backwall booth		700(W)*1300(D)*1800(H)	User Environment	Operating Storage	0°C-60°C, 15%-85% non condensing -15°C-75°C, 15%-85% non condensing



Contact : Witek System Inc. (South Korea) 3FL.Bum-A Bldg. 7-12 Gangnam-daero 27 Gil , Seocho-gu Seoul. South Korea

Tel : +82 2 2057 5960 email : [jayeom@witek.co.kr](mailto:jayeom@witek.co.kr) web : [www.witekssystem.com](http://www.witekssystem.com) & [www.witek.co.kr](http://www.witek.co.kr)

Product specifications, size and shape are subject to change without notice and actual product appearance may differ from that depicted herein





## Biometric Data Capture Process

