


WLT+LT150

ONLINE LOTTERY TERMINAL

WLT+LT150 has a simple and compact design suitable for any commercial location. It is also made of industrial components to offer long life expectancy and durability. The scanner printer unit is powerful & unique functionality for the operator to run their whole system with economic budget. The display with adjustable view angle ensures operating convenience. Various I/O ports make the model compatible with numerous devices. Optional MSR and IC Card readers are also available.

A versatile terminal for various applications, incorporating all the latest technologies to provide the best quality and the highest reliability. This low maintenance terminal can be configured with numerous options enabling game operators to adapt their system configurations as their requirements change overtime.



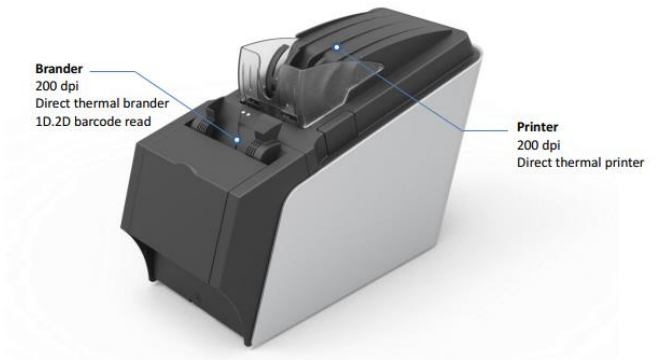

Hardware Specification

Main Unit

CPU	Intel Processor J1900 2.42Ghz (I3 option etc.)	MSR (Optional)	Standard USB Interface protocol(option)
RAM	4 GB DDR Memory	IC Card Reader (Optional)	PC/SC type (option)
HDD	60GB M.2 SSD	2D Barcode Reader(Optional)	2D barcode reader(option)
Monitor	15.1"(inch) TFT-LCD		
Monitor Resolution	1024x768	OS	Windows, Linux
Touch Screen	Multi Capacitive touch	I/O ports	1 x PS/2 K/B, 1 x PS/2 Mouse, 1 x VGA, 1x Gigabit LAN, 4 x USB 2.0 ports

Scanner

Scanning Element	CIS	Scanning Speed	Max.350 mm/s
Scanning Resolution	200 DPI	Paper Thickness	0.1mm ~ 0.2 mm
Scanning Size	A6 - 104mm(w) X 290mm(h)	MTBF	50,000 hours (CIS only)
Interface	USB 2.0 Standard protocol	Optional TPH	1" thermal brander (Option)

* Free OMR software SDK

Printer (stand alone)

Printer Type	Direct Thermal Printing	Paper	Thermal roll paper
Speed	Up to 200mm/s	Paper width	82.5mm ±0.5mm (3.25 inch)
Resolution	200 DPI	Roll Diameter	80 mm (Option: 100mm)
Image Support	1bit bitmap	Cutter	Full-cut and Partial-cut support

Options : Customer display, MSR, ICR, 2D BCR and Brander

Contact : Witek System Inc. (South Korea) 104-601 SK Ventium 166 Gosan-ro Gunpo-si Gyeonggi-do South Korea
Tel : +82 31 454 5960 Email : sales@witek.co.kr

Brander
200 dpi
Direct thermal
1D, 2D, PDF417,
QR code read

Printer
200 dpi
220mm/sec High speed
Clamshell cover
6" roll diameter support
Various sensor control
Large volume stacker

Detachable Brander

Release : Counterclockwise



Separated from the printer as following steps

